# 279-S00

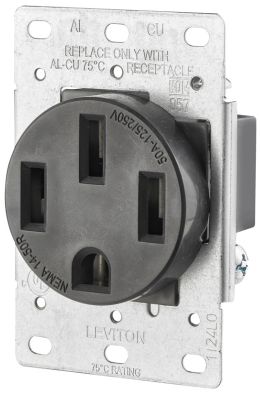


50 Amp Flush Mount Outlet/Receptacle

50 Amp, 125/250 Volt, 3-Pole, 4-Wire, Flush Mtg Receptacle, Straight Blade, Grounding – Black

**WARNING:** Do not use with single-gang wallboxes, single-gang mud rings or single-gang box extenders.

**Not Recommended for Electric Vehicle Charging** (See Leviton EV Outlets)

**ROHS Compliant :** Yes

- DURABLE – Shallow design built of durable high-impact thermoplastic
- EASY TO INSTALL – Terminals marked for easy identification and fast wiring, terminals require 40 in lbs
- EFFICIENT – Features heavy-gauge, high-performance copper contacts
- CONVENIENT – All mounting hardware included
- COMPATIBLE – Fits all wallplates with 2.15" diameter center hole

**UPC Code :** 078477695302

**Country Of Origin :** Mexico

**NEMA :**

14-50R

## Technical Information

AC Horsepower Ratings

**At Rated Voltage :** 3 HP

Electrical Specifications

**Amperage :** 50 A

**Current Limiting :** Full Rated Current

**Dielectric Voltage :** Withstands 2000V per UL498

**Grounding :** Grounding

**Pole :** 3

**Temperature Rise :** Max 30C after 50 cycles OL at 150 percent rated current

**Voltage :** 125/250 VAC

**Wire :** 4

Environmental Specifications

**Flammability :** Rated V-2 per UL 94

**Operating Temperature :** -40° C to 60°C

Material Specifications

**Body Material :** Polypropylene

**Color :** Black

**Face Material :** Polypropylene

**Line Contacts :** Brass Double-Wipe

**Strap Material :** Galvanized Steel

Mechanical Specifications

Product Features

**Product ID :** Ratings are permanently marked on device

**Terminal Accom. :** #4 AWG

**Terminal ID :** X (Brass screw or Black screw) = Hot; Y (Brass screw or Black screw) = Hot; White (Silver screw) = Neutral; Green (Green screw) = Ground

**Torque Range :** 40 in-lbs.

Standards and Certifications

**ANSI :** C73

**CSA :** 22.2 No 42, C22.2 No. 14, C22.2 No.65

**File :** E13399

**NEMA :** WD-6

**NOM :** NOM - ANCE

**UL :** UL 498, UL 486E

**Warranty :** 2-Year Limited

**Amperage :** 50 A

**Color :** Black

**NEMA :** 14-50R

**Voltage :** 125/250 VAC

**Leviton Manufacturing Co., Inc**

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 · FAX: +1-800-824-3005 ·

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52) 5386- 1797 ·

**Visit our Website at: www.leviton.com**

© 2025 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to: www.leviton.com/company/about-leviton/locations

**© 2025 Leviton Manufacturing Co., Inc.**